



A75

Description

Forged brass female to male reducer. With pin or rocker lugs.

Technical data

- Rated pressure: 300 PSI
- Body: forged brass

Product specifications

A75


Forged brass female to male reducer, with pin or rocker lugs, 300 lbs rated.

Versions and product codes

Size 1	Threads 1	Size 2	Threads 2	Lugs	Finishing	Code
2 1/2"	NST	1 1/2"	NPSH	Pin	Forged brass	A75Y003
					Polished brass	A75Y103
	NST	1 1/2"	NST	Pin	Rough chrome	A75X001
					Polished chrome	A75X101
					Forged brass	A75Y001
					Polished brass	A75Y101
	NST	1 1/2"	NYFD	Pin	Polished chrome	A75X105
					Forged brass	A75Y005
					Polished brass	A75Y105
	NYCT	1 1/2"	NYFD	Pin	Forged brass	A75Y029
	NYFD	1 1/2"	NST	Pin	Forged brass	A75Y015
	NYFD	1 1/2"	NYFD	Pin	Forged brass	A75Y017
					Polished brass	A75Y117
	NYFD	3/4"	HG	Pin	Forged brass	A75Y019
	NYT	1 1/2"	NST	Pin	Polished chrome	A75X125
					Forged brass	A75Y025
					Polished brass	A75Y125
	NYT	1 1/2"	NYFD	Pin	Polished chrome	A75X129
					Polished brass	A75Y129
	BCT	1 1/2"	NPSH	Rocker	Rough chrome	A75X052
					Forged brass	A75Y052
	CSA	1 1/2"	NPSH	Rocker	Forged brass	A75Y050
					Polished chrome	A75X102
					Forged brass	A75Y002
	NST	1 1/2"	NST	Rocker	Polished brass	A75Y102
					Forged brass	A75Y058
	NWFLD	1 1/2"	NPSH	Rocker	Forged brass	A75Y058
	QST	1 1/2"	NPSH	Rocker	Polished brass	A75Y154
Rough chrome					A75X054	
Forged brass					A75Y054	
WCT	1 1/2"	NPSH	Rocker	Forged brass	A75Y056	
3,06 x 6		1 1/2"	NST	Pin	Forged brass	A75Y037
3,09 x 8		1 1/2"	NST	Pin	Forged brass	A75Y041
3,125 x 7,5		1 1/2"	NST	Pin	Forged brass	A75Y035
3,14 x 8		1 1/2"	NST (SYRACUSE)	Pin	Forged brass	A75Y046
3,25 x 6		1 1/2"	NST	Pin	Forged brass	A75Y039
3,312 x 8		1 1/2"	NST	Rocker	Forged brass	A75Y062



Dimensions

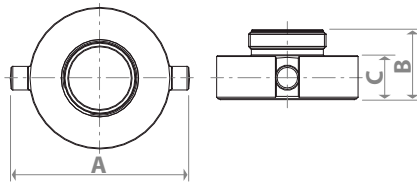

Code	A [mm]	B [mm]	C [mm]
A75Y003	109	43	27
A75Y103	109	43	27
A75X001	109	43	27
A75X101	109	43	27
A75Y001	109	43	27
A75Y101	109	43	27
A75X105	109	43	27
A75Y005	109	43	27
A75Y105	109	43	27
A75Y029	109	43	27
A75Y015	109	43	27
A75Y017	109	43	27
A75Y117	109	43	27
A75Y019	109	45	27
A75X125	109	43	27
A75Y025	109	43	27
A75Y125	109	43	27
A75X129	109	43	27
A75Y129	109	43	27
A75X052	109	43	27
A75Y052	109	43	27
A75Y050	109	43	27
A75X102	109	43	27
A75Y002	109	43	27
A75Y102	109	43	27
A75Y058	112	43	27
A75Y154	109	43	27
A75X054	109	43	27
A75Y054	109	43	27
A75Y056	112	43	27
A75Y037	109	43	27
A75Y041	109	43	27
A75Y035	109	43	27
A75Y046	109	43	27
A75Y039	109	43	27
A75Y062	112	43	27

Additional information

For more information, go to www.giacomini.com or contact our technical assistance service: ☎ +39 0322 923372 📠 +39 0322 923255 ✉ consulenza.prodotti@giacomini.com
 This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith.
 The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.
 Giacomini S.p.A. Via per Alzo, 39 - 28017 San Maurizio d'Opaglio (NO) Italy