




TOP VIEW



BOTTOM VIEW

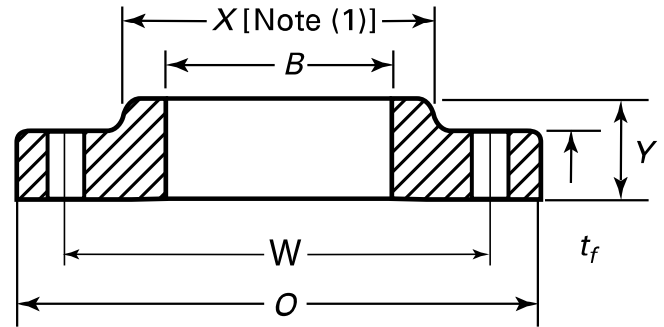

* Referential photo

Fiorella Representaciones S.A.C. Importador y distribuidor autorizado de bridas FR para Perú y para su exportación.

Dimensions are in mm

Nominal Pipe Size, NPS inch	Outside Diameter of Flange (O)	Minimum Thickness of Flange, (t _f)	Diameter of Hub (X)	Length Through Hub (Y)	Bore Minimum (B)	Diameter of Bolt Circle (W)	Diameter of Bolt Holes (inch)	Number of Bolts	Diameter of Bolts (inch)	Weight Approx. (kg)
1/2"	89	9.7	30	14	22.4	60.5	5/8	4	1/2	0.47
3/4"	99	11.2	38	14	27.7	69.8	5/8	4	1/2	0.59
1"	108	12.7	49	16	34.5	79.2	5/8	4	1/2	0.86
1 1/4"	117	14.2	59	19	43.2	88.9	5/8	4	1/2	1.08
1 1/2"	127	15.9	65	21	49.5	98.6	5/8	4	1/2	1.41
2"	152	17.5	78	24	61.9	120.6	3/4	4	5/8	2.26
2 1/2"	178	20.6	90	27	74.7	139.7	3/4	4	5/8	3.43
3"	190	22.4	108	28	90.7	152.4	3/4	4	5/8	3.87
3 1/2"	216	22.4	122	30	103.4	177.8	3/4	8	5/8	4.45
4"	229	22.4	135	32	116.1	190.5	3/4	8	5/8	5.75
5"	254	22.4	164	35	143.8	215.9	7/8	8	3/4	6.22
6"	279	23.9	192	38	170.7	241.3	7/8	8	3/4	7.38
8"	343	26.9	246	43	221.5	298.4	7/8	8	3/4	12.36
10"	406	28.4	305	48	276.4	362.0	1	12	7/8	17.10
12"	483	30.2	365	54	327.2	431.8	1	12	7/8	27.68
14"	533	33.3	400	56	359.2	476.2	1 1/8	12	1	35.20
16"	597	35.1	457	62	410.5	539.8	1 1/8	16	1	42.18
18"	635	38.1	505	67	461.8	577.8	1 1/4	16	1 1/8	49.71
20"	698	41.1	559	71	513.1	635.0	1 1/4	20	1 1/8	65.50
22"	749	44.4	610	78	564.4	692.2	1 3/8	20	1 1/4	78.48
24"	813	46.0	663	81	616.0	749.3	1 3/8	20	1 1/4	90.50

Note (1) This dimension is for large end of hub, which may be straight or tapered. Taper shall not exceed 7 deg on threaded, slip-on, socket-welding, and lapped flanges. This dimension is defined as the diameter at the intersection between the hub taper and back face of the flange.

*** Note : Dimensions, design and materials are subject to change without notice. Reference weights**

MAC - MMXXIV

