


STANDARD CLEVIS HANGER UL & FM

COLGADOR CLEVIS

Heavy Duty Clevis Hanger

- Material : Carbon Steel - Zinc Plated
Plain Oil Finish
304/316 Stainless Steel
- Application : Designed for suspending non-insulated stationary pipe, also stainless steel pipe, allowing for vertical adjustment .
- Ordering : Specify pipe size and figure number .
- Approvals : Complies with Manufacturers Standardization Society SP-69 Type 1

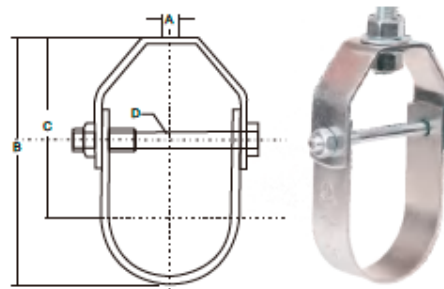

1/2" thru 6" ,Zinc Plated only



3/4" thru 5" ,Zinc Plated only

SIZE		"A"		"B"		"C"		"D"		Lower Material		Upper Material		Max Rec Load
in	pipe size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs.
1/2	21.4	3/8	10	2-7/8	73	2-3/8	61	1/4	6	1/8x1	3x25	1/8x1	3x25	610
3/4	26.7	3/8	10	3-3/16	80	2-9/16	66	1/4	6	1/8x1	3x25	1/8x1	3x25	610
1	33.4	3/8	10	3-3/8	86	2-11/16	68	1/4	6	1/8x1	3x25	1/8x1	3x25	730
1-1/4	42.2	3/8	10	3-3/4	95	2-3/4	73	1/4	6	1/8x1	3x25	1/8x1	3x25	730
1-1/2	48.3	3/8	10	4-1/16	103	3-1/16	78	1/4	6	1/8x1	3x25	1/8x1	3x25	730
2	60.4	3/8	10	4-1/2	114	3-1/4	83	1/4	6	1/8x1	3x25	1/8x1	3x25	730
2-1/2	73.1	1/2	13	5-1/2	140	4-1/16	103	3/8	10	3/16x1-3/16	4.5x30	3/16x1-3/16	4.5x30	1350
3	88.9	1/2	13	6-1/8	155	4-5/16	109	3/8	10	3/16x1-3/16	4.5x30	3/16x1-3/16	4.5x30	1350
3-1/2	101.6	1/2	13	6-3/4	171	4-11/16	119	3/8	10	3/16x1-3/16	4.5x30	3/16x1-3/16	4.5x30	1350
4	114.3	5/8	16	7-5/8	193	5-5/16	135	3/8	10	3/16x1-3/16	4.5x30	1/4x1-3/16	6x30	1430
5	141.3	5/8	16	8-7/8	225	6-1/16	153	1/2	13	3/16x1-3/16	4.5x30	1/4x1-3/16	6x30	1430
6	168.3	3/4	20	10	254	6-5/8	169	1/2	13	3/16x1-1/2	4.5x38	1/4x1-1/2	6x38	1940
8	219.1	3/4	20	12-3/4	324	8-3/8	213	5/6	16	3/16x1-1/2	4.5x38	1/4x1-1/2	6x38	2000
10	273.1	7/8	23	16-5/8	423	11-1/4	286	3/4	19	1/4x2	6x50	5/16x2	8x50	3600
12	323.9	7/8	23	18-5/8	475	12-5/16	313	3/4	19	1/4x2	6x50	5/16x2	8x50	3800
14	355.6	1	25	20-5/16	516	13-5/16	338	7/8	22	1/4x2	6x50	1/2x2	12x50	4200
16	406.4	1	25	22-1/16	560	14	355	1	25	1/4x2-1/2	6x64	1/2x2-1/2	12x64	4600
18	457.2	1	25	24-3/4	628	15-11/16	399	1-1/8	28	1/4x2-1/2	6x64	1/2x2-1/2	12x64	4800
20	508.0	1-1/4	32	27-3/8	695	17-3/4	441	1-1/4	32	5/16x3	8x76	5/8x3	16x76	4800
24	609.6	1-1/4	32	31-5/8	803	19-5/8	498	1-1/4	32	5/16x3	8x76	5/8x3	16x76	4800