

Normas de Diseño:

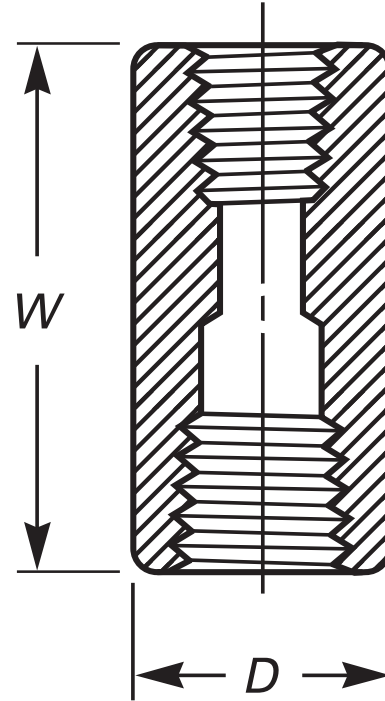
Roscado NPT ANSI B1.20.1

ASME B16.11

Material: Acero Inoxidable ASTM A182

CF8 (304) y CF8M (316)

Presión de Trabajo: 3000 PSIG


Unidad: Milímetros (mm)

Medida		Extremo a Extremo W	Diámetro Exterior D
pulg	mm		
1/8"	6	32	16
1/4"	8	35	19
3/8"	10	38	22
1/2"	15	48	28
3/4"	20	51	35
1"	25	60	44
1 1/4"	32	67	57
1 1/2"	40	79	64
2"	50	86	76
2 1/2"	65	92	92
3"	80	108	108
4"	100	121	140