

DESIGN FEATURES:


Investment casting
Screwed-in bonnet
Rising stem
T handle or handwheel operation
Connecting threads: NPT ANSI/ASME B1.20.1
Working pressure: 6000 PSI
Female x female (fxf) threaded ends
Test standard: API 598

* Reference photo

MATERIAL LIST

| | PART NAME | MATERIAL | QTY. |
|---|-----------|--------------------|------|
| 1 | SET SCREW | SS304 | 1 |
| 2 | HANDLE | SS410 | 1 |
| 3 | STEM | SS316 | 1 |
| 4 | GLAND NUT | SS304 | 1 |
| 5 | GLAND | SS304 | 1 |
| 6 | PACKING | TEFLON | 1 |
| 7 | BONNET | ASTM A351 Gr. CF8M | 1 |
| 8 | BODY | ASTM A351 Gr. CF8M | 1 |

Fiorella Representaciones S.A.C.
Importador y distribuidor autorizado
de válvulas SUN en territorio
latinoamericano.

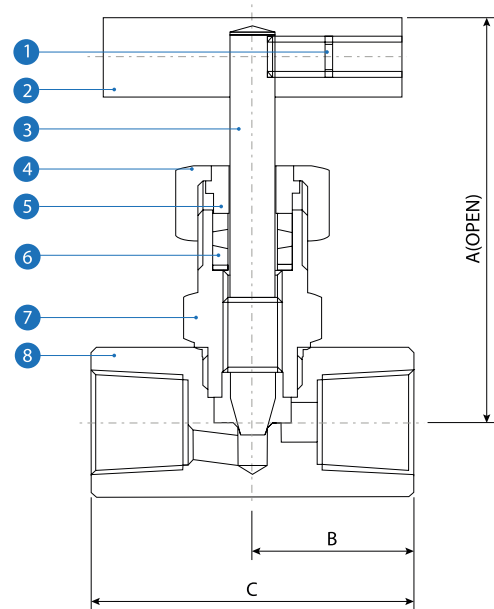

DIMENSIONS (mm)

| SIZE | L | L1 | T | WEIGHT (Kg) |
|------|-----|------|----|-------------|
| 1/8" | 75 | 29.0 | 58 | 0.350 |
| 1/4" | 75 | 29.0 | 58 | 0.380 |
| 3/8" | 75 | 29.0 | 58 | 0.360 |
| 1/2" | 87 | 32.5 | 65 | 0.440 |
| 3/4" | 90 | 35.0 | 70 | 0.800 |
| 1" | 103 | 40.0 | 80 | 1.031 |

* Note : Dimensions, design and materials are subject to change without notice.