




\* Reference photo

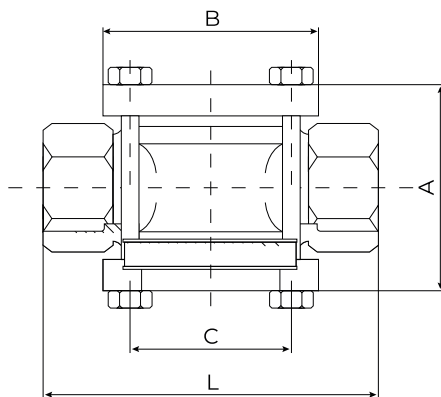

**Fiorella Representaciones S.A.C.**  
Importador y distribuidor autorizado  
de válvulas SUN en territorio  
latinoamericano.

Body material SS 316  
Ends threaded NPT ASME B1.20.1  
Glass: Normal with thermal treatment  
"PYREX" Glass  
Max Working Pressure 16 bar  
Normal Working temperature: 130 °C.  
Maximum Temperature (short-term): 160°C


## MATERIAL LIST

|   | PART NAME | MATERIAL       |
|---|-----------|----------------|
| 1 | Body      | SS 316         |
| 2 | Glass     | Tempered Glass |
| 3 | Cap       | SS 316         |
| 4 | Joint     | PTFE           |
| 5 | Screw     | SS 304         |

## DIMENSIONS (mm)

| SIZE   | PN | L     | A     | B    | C    | GLASS     | WEIGHT (Kg) |
|--------|----|-------|-------|------|------|-----------|-------------|
| 1/2"   | 16 | 95.6  | 63.9  | 60.9 | 41.0 | Ø 50 x 8  | 0.90        |
| 3/4"   | 16 | 100.2 | 68.1  | 64.5 | 45.0 | Ø 50 x 8  | 1.04        |
| 1"     | 16 | 120.5 | 78.7  | 78.0 | 54.0 | Ø 63 x 10 | 1.62        |
| 1 1/4" | 16 | 139.3 | 87.2  | 82.1 | 58.2 | Ø 63 x 10 | 2.14        |
| 1 1/2" | 16 | 145.9 | 93.7  | 81.4 | 59.0 | Ø 80 x 12 | 2.42        |
| 2"     | 16 | 157.9 | 113.1 | 89.4 | 66.5 | Ø 80 x 12 | 3.34        |

## PRESSURE TEMPERATURE RATING

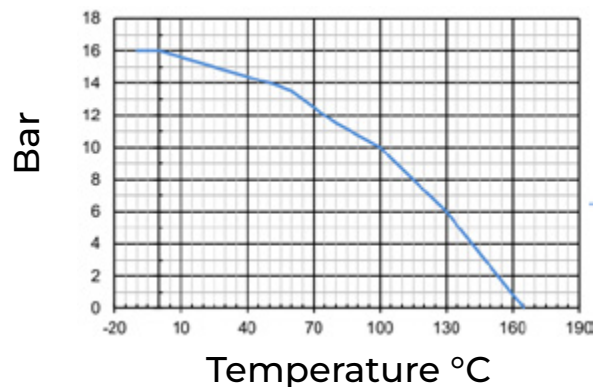

\* Note : Dimensions, design and materials are subject to change without notice.

