



* Referential photo



Machine Bolt With Nuts

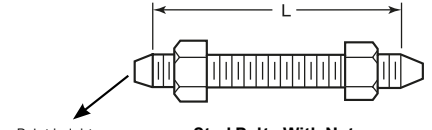

Stud Bolts With Nuts

Point height
(Note 1)

Note 1: The length of the stud bolt does not include the height of the points

Fiorella Representaciones S.A.C. Importador y distribuidor autorizado de bridas FR para Perú y para su exportación.

Dimensions are in mm

Nominal Pipe Size, NPS		Outside Diameter of Flange (O)	Minimum Thickness of Flange, (t _f)	Diameter of Bolt Circle (W)	Diameter of Bolt Holes (inch)	Number of Bolts	Diameter of Bolts (inch)	Length of Bolts (L)			Weight Approx. (kg)
								Stud Bolts		Machine Bolts	
inch	mm							2mm Raised Face	Ring Joint	2mm Raised Face	
1/2"	12	95	14.3	66.7	5/8	4	1/2	75	70	75	0.91
3/4"	18	115	15.9	82.6	3/4	4	5/8	90	85	90	1.40
1"	25	125	17.5	88.9	3/4	4	5/8	90	85	90	1.81
1 1/4"	31	135	20.7	98.4	3/4	4	5/8	95	90	95	2.40
1 1/2"	38	155	22.3	114.3	7/8	4	3/4	110	100	110	3.40
2"	50	165	25.4	127.0	3/4	8	5/8	110	100	110	4.40
2 1/2"	63	190	28.6	149.2	7/8	8	3/4	120	115	120	6.80
3"	75	210	31.8	168.3	7/8	8	3/4	125	120	125	8.90
3 1/2"	88	230	35.0	184.2	1	8	7/8	140	135	140	-
4"	100	275	38.1	215.9	1	8	7/8	145	140	145	18.60
5"	125	330	44.5	266.7	1 1/8	8	1	165	160	165	30.84
6"	150	355	47.7	292.1	1 1/8	12	1	170	165	170	38.00
8"	200	420	55.6	349.2	1 1/4	12	1 1/8	190	185	195	62.20
10"	250	510	63.5	431.8	1 3/8	16	1 1/4	215	210	210	102.00
12"	300	560	66.7	489.0	1 3/8	20	1 1/4	220	215	220	132.00
14"	350	605	69.9	527.0	1 1/2	20	1 3/8	235	230	235	158.00
16"	400	685	76.2	603.2	1 5/8	20	1 1/2	255	250	255	224.73
18"	450	745	82.6	654.0	1 3/4	20	1 5/8	275	265	275	285.00
20"	500	815	88.9	723.9	1 3/4	24	1 5/8	285	280	290	365.00
22"	550	870	95.2	777.7	1 7/8	24	1 3/4	305	---	310	-
24"	600	940	101.6	838.2	2	24	1 7/8	330	325	335	533.45

MAC - MMXXIV

* Note : Dimensions, design and materials are subject to change without notice. Reference weights

