




CODO 180° Long Radius

Normas de Diseño
: ANSI/ASME B16.9
Material:
Acero A234 WPB
Cédula:
STD, SCH 40, XS, SCH 80,
SCH 160
Espesor Mínimo:
-12.5% del valor nominal

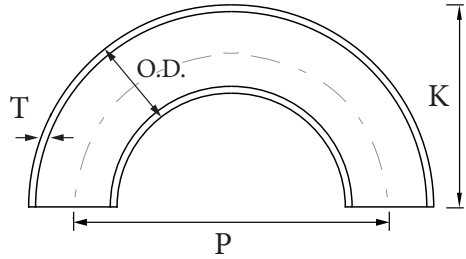

Unidad: Milímetros (mm)

MEDI- DA	DIÁMETRO EXTERIOR (OD)	ESPESOR DE PARED (T)					CENTRO A CENTRO (P)	ALTO (K)	PESO APROX (Kg)				
		STD	SCH 40	XS	SCH 80	SCH 160			STD	SCH 40	XS	SCH 80	SCH 160
1/2"	21.3	2.8	2.8	3.7	3.7	4.8	76.2	47.8	0.16	0.16	0.20	0.20	-
3/4"	26.7	2.9	2.9	3.9	3.9	5.6	76.2	50.8	0.22	0.22	0.28	0.28	-
1"	33.5	3.4	3.4	4.5	4.5	6.4	76.2	55.6	0.32	0.32	0.40	0.40	0.50
1 1/4"	42.2	3.6	3.6	4.9	4.9	6.4	95.3	69.9	0.52	0.52	0.70	0.70	0.84
1 1/2"	48.3	3.7	3.7	3.7	3.7	7.1	114.3	82.6	0.74	0.74	1.00	1.00	1.30
2"	60.5	3.9	3.9	5.5	5.5	8.7	152.4	106.4	1.32	1.32	1.80	1.80	2.66
2 1/2"	73.2	5.2	5.2	7.0	7.0	9.5	190.5	131.8	2.74	2.74	3.58	3.58	4.66
3"	88.9	5.5	5.5	7.6	7.6	11.1	228.6	158.8	4.08	4.08	5.48	5.48	7.66
4"	114.3	6.0	6.0	8.6	8.6	13.5	304.8	209.6	7.68	7.68	10.7	10.7	16.1
5"	141.2	6.6	6.6	9.5	9.5	15.9	381.0	261.9	13.0	13.0	18.3	18.3	29.4
6"	168.1	7.1	7.1	11.0	11.0	18.3	457.2	312.7	19.9	19.9	30.0	30.0	48.4
8"	218.9	8.2	8.2	12.7	12.7	23.0	609.6	414.3	40.2	40.2	61.0	61.0	106
10"	273.1	9.3	9.3	12.7	15.0	28.6	762.0	517.7	70.8	70.8	97.6	114	206
12"	323.9	9.5	10.3	12.7	17.5	33.3	914.4	619.3	106	114	140	188	342
14"	355.9	9.5	11.1	12.7	19.1	35.7	1066.8	711.2	136	158	180	266	472
16"	406.4	9.5	12.7	12.7	21.4	40.4	1219.2	812.8	179	236	236	390	700
18"	457.2	9.5	14.3	12.7	23.8	45.2	1371.6	914.4	226	338	300	550	990
20"	508.0	9.5	15.0	12.7	26.1	50.0	1524.0	1016.0	280	440	372	746	1352
22"	558.8	9.5	-	12.7	28.6	54.0	1676.4	1117.6	340	-	450	986	1772
24"	609.6	9.5	17.5	12.7	31.0	59.5	1828.8	1219.2	404	732	538	1272	2320

Ediciones MAC - MIMXV

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.