



* Reference photo

Norm: ASTM A270

Standard: 3A

Material: SS 304


Ends: Clamp

Polish: 320 Grit Inside / Outside

Tolerances: The wall thickness at any point shall not vary more than 12.5 %, from the specified wall thickness.

Fiorella Representaciones S.A.C.
Importador y distribuidor autorizado de productos HGA
para Perú y para su exportación.

DIMENSIONS

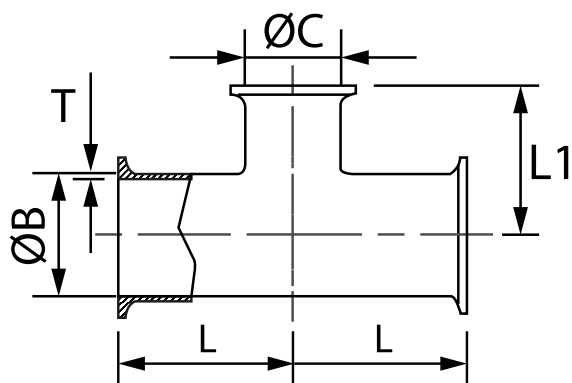

SIZE	B	C	L	L1	T (wall thickness)
inch	mm	mm	mm	mm	mm
1 1/2" X 1"	38.1	25.4	69.85	66.68	1.65
2" X 1"	50.8	25.4	88.90	73.00	1.65
2" X 1 1/2"	50.8	38.1	88.90	76.20	1.65
2 1/2" X 1 1/2"	63.5	38.1	88.90	82.55	1.65
2 1/2" X 2"	63.5	50.8	88.90	95.25	1.65
3" X 1 1/2"	76.2	38.1	98.25	88.90	1.65
3" X 2"	76.2	50.8	95.25	101.60	1.65
3" X 2 1/2"	76.2	63.5	95.25	95.25	1.65
4" X 2"	101.6	50.8	114.20	114.30	2.11
4" X 2 1/2"	101.6	63.5	114.20	107.95	2.11
4" X 3"	101.6	76.2	114.20	107.95	2.11

* Photos and reference data. We accept no liability for incorrect uses or misinterpretations of this data.

