


**DESIGN FEATURES:**

Body: ASTM A351 Gr. CF8M (316)  
Screen: SS304  
Gasket: PTFE  
MAX WORKING PRESSURE:  
740 PSI @ -28°C A 38°C  
Flange Dimensions: ANSI/ASME B16.5 #300  
Test standard: API 598

\* Reference photo

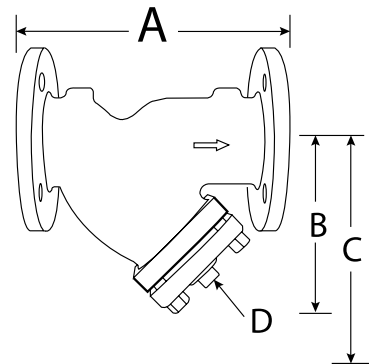

**MATERIAL LIST**

PART NAME	MATERIAL	QTY.
BODY	ASTM A351 Gr. CF8M	1
CAP	ASTM A351 Gr. CF8M	1
GASKET	PTFE	1
SCREEN	SS316	1
BOLT	ASTM A193 B8	4-8
PLUG	SS316	1

**Fiorella Representaciones S.A.C.**  
Importador y distribuidor autorizado  
de válvulas SUN en territorio  
latinoamericano.

**DIMENSIONS (mm)**

SIZE	A	B	C	D	CV FACTOR	WEIGHT (Kg)
2"	245	134	178	15	70	11.79
2 1/2"	270	166	248	25	110	18.10
3"	305	178	254	25	160	23.81
4"	369	210	305	4	260	42.64
5"	491	286	432	50	400	73.20
6"	491	343	508	50	570	84.41
8"	594	394	578	50	950	117.93
10"	696	470	712	50	1600	185.07
12"	813	553	762	50	2200	286.67

MAC - MMXXI

\* Note : Dimensions, design and materials are subject to change without notice.